


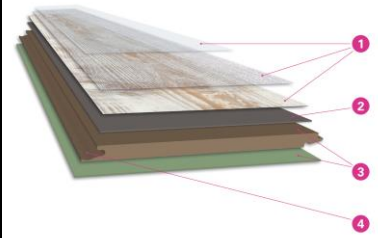
TECHNICAL CHARACTERISTICS











wineo 400 Multi-Layer – 2023


Long-lasting multi-layer floor (Multi-Layer) according to DIN EN 16511 for glueless installation

wineo

	wood L	wood XL	stone L
Format	1222 x 182 mm	1520 x 230 mm	601 x 310 mm
Product thickness	9 mm	9 mm	9 mm
Planks, tiles / m² per box	9 / 2.00 m ²	6 / 2.10 m ²	9 / 1.68 m ²
Boxes / m² per pallet	44 / 88.00 m ²	52 / 109.20 m ²	60 / 100.80 m ²
Guarantee	20 years for private use according to Windmüller warranty conditions - www.wineo.de		









Classification		Product composition	
 Utilization class 23 EN ISO 10874	Domestic area with intensive usage	1	Top element Surface texture, surface seal, wear layer and decor film
 Utilization class 31 EN ISO 10874	Commercial sector with low or occasional usage		
Wear layer binder content EN ISO 10582	Typ I	2	Base layer
 R10 Anti slip category EN 16165	R 10	3	Core board with integrated soundPROTECT underlay mat
 Resistance to staining EN 438	Group 1 + 2: grade 4 Group 3: grade 3	4	Profile connection LocTec® locking with profile seal 
 Light fastness EN ISO 105-B02	Light fastness (procedure 2) ≥ 6		bevelled edge – 4-sides
 Residual indentation EN ISO 24343-1	≤ 0.2 mm		 TÜV PROFICERT 70 710 4061-9 www.proficert.com tested for emissions, harmful substances PREMIUM
 Thermal resistance EN 12667	≤ 0.058 (m ² K)/W		
 Impact sound reduction EN ISO 16251-1	~ 14 dB		
REACH	free from SVHC substances ≥ 0.1 %		
Disposal	<u>Private:</u> Possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203		



Windmüller GmbH
Nord-West-Ring 21
D-32832 Augustdorf

DOP: 0301010
EN 14041:2004 / AC2006
1658


- 18 -

≤ 2 kV ≥ 0.15 W/(mK)

www.wineo.de

ÉMISSIONS DANS L'AIR INTÉRIEUR*



A+

A+ A B C

Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)



factory made

coated

Relevant information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.