




STAIRTEC SC stair nosing profiles are particularly designed for thin, resilient floor types. Simply lay the flooring on the step riser and install the profile covering the riser edge. Then lay the tread flooring flush in the indented lip of the profile. **STAIRTEC SC** profiles protect the tread edge and conceal riser imperfections.



stairtec SC

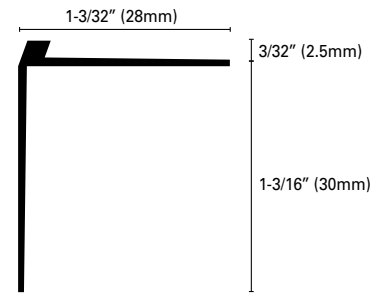

STAIRTEC SC 30 A*N Extruded Anodized Aluminum

This stair nosing profile for resilient flooring types in thicknesses ranging from 3/32" to 1/8" (2 to 3mm) is available in three finishes: silver (AS), gold (AO), bronze (AB). It is easy to apply and highly resistant to oxidation.

	H'+H = in	mm	Art.		
Material:	3/32+1-3/16	2.5+30	SC	30	ASN
Extruded Anodized Aluminum	3/32+1-3/16	2.5+30	SC	30	AON
Finish*: Silver (ASN), Gold (AON), Bronze (ABN)	3/32+1-3/16	2.5+30	SC	30	ABN
Length: 8'10" (2.70meters)					